

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number  
**WO 2005/053106 A1**

(51) International Patent Classification<sup>7</sup>: **H01R 13/24**

(21) International Application Number:  
PCT/US2004/039088

(22) International Filing Date:  
19 November 2004 (19.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
200320100682.0  
20 November 2003 (20.11.2003) CN

(71) Applicant and

(72) Inventor: XU, Xiang [CN/CN]; Room 601, N°20, Yuesheng Apartment House, Xiaolin Road, Yushan Town, Kunshan City, Jiangsu (CN).

(74) Agent: WEISS, Stephen, Z.; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).


(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): MOLEX INCORPORATED [US/US]; 2222 Wellington Court, Lisle, Illinois 60532 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DOUBLE-ENDED PRESSURE CONTACTING ELECTRICAL TERMINAL

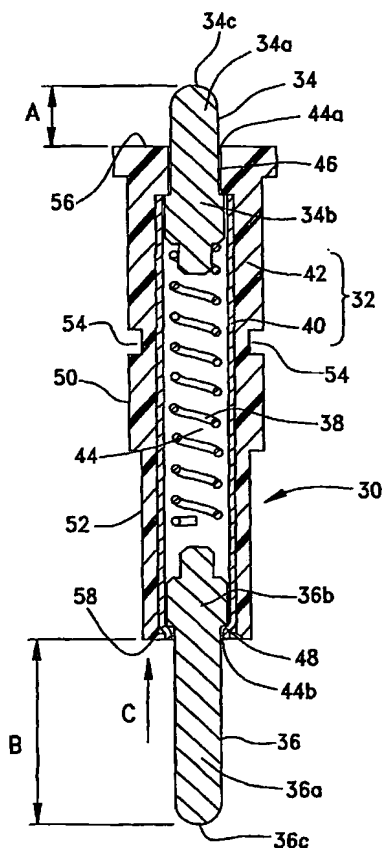

(57) Abstract: An electrical terminal (30) includes first (34) and second (36) contact members having outer pressure contacting end portions (34a, 36a) for pressure engaging first and second electrical devices, respectively, along with enlarged inner end portions (34b, 36b). The pressure contacting end portion of one contact member is longer than the pressure contacting end portion of the other contact member. A sleeve (32) is provided with a through hole (44) for slidably receiving the inner end portions of the first and second contact members. The through hole has opposite open ends (44a, 44b) through which the pressure contacting end portions of the contact members project. A biasing member (38) is disposed in the through hole to resiliently bias the contact members in opposite directions.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *with amended claims*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*